

PG-9077说明书 80g米黄色特种纸,双面折页 尺寸: 630x142mm

ipega®

蝙蝠侠蓝牙手柄
产品说明书(PG-9077)中文版

适用说明:

- 1.非常感谢您购买ipega公司开发生产的蝙蝠侠蓝牙手柄;
- 2.产品主要适用于在Android/iOS/Win7/8/10系统蓝牙连接无线连接时,进行游戏操作时使用!
- 3.适用设备:智能手机/平板电脑/智能电视机、机顶盒/PC电脑;
- 4.L2/R2为模拟量功能,更加注重体验的细节,使游戏精准可控!
- 5.带Turbo加速功能,在游戏操作时功能更加强大,快捷!
- 6.在鼠标模式下,带多媒体功能:音量+、音量-、播放、暂停/上一曲/下一曲;


*因官方游戏平台软件升级或源代码变更等不可抗拒的因素造成部分游戏无法与本产品连接操作,我公司不承担任何责任。对此我公司保留最终解释权。

售后客服QQ群: 144981572
客服电话: 400-806-3006
在线时间: 周一至周五9:30-17:30




安卓游戏平台下载二维码
艾派格官方微信公众
(扫码看教程)

功能按键图示:

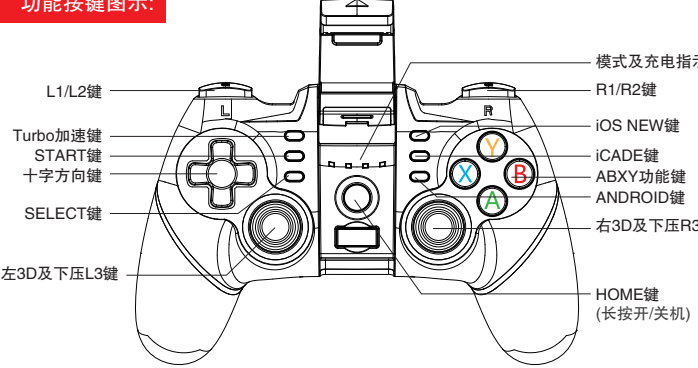

模式及充电指示灯
R1/R2键
iOS NEW键
iCADE键
ABXY功能键
ANDROID键
右3D及下压R3键
HOME键
(长按/关机)左3D及下压L3键
Turbo加速键
START键
十字方向键
SELECT键
L1/L2键

操作使用模式:

适用系统	Android 系统	iOS 系统
工作模式	HID模式(GamePad)	iCade 模式
模式配对 (长按2秒)	Android+ 键	NEW+ 键
指示 灯	LED1	LED3
备 注	在HID模式下,可以通过短按 键切换到鼠标模式	默认键为键盘英文输入法 支持iOS非越狱设备

适用系统	Windows 系统	
工作模式	蓝牙连接模式	USB有线模式
模式配对 (长按2秒)	+Android 键同时按	按住Start上电
指示 灯	LED1	LED2
备 注	需自配蓝牙接收器	需数据线

电性参数:

- 1.工作电压: DC3.7V
- 2.工作电流: 30mA
- 3.持续使用时: 12H
- 4.休眠电流: <10uA
- 5.充电电压/电流: DC5V/500mA
- 6.蓝牙传输距离: <=8M
- 7.电池容量: 380mAh
- 8.待机时间: 满电放置30天

安卓设备使用说明:

安卓系统绝大多数游戏采用 Android HID模式进行游戏操作; 在相关手机游戏或模拟器下载的游戏同样支持,如“葡萄游戏厅”)


- 1.同时按住Android+ 键2秒,此时四个LED指示灯同时快闪;如图1
- 2.将安卓设备的蓝牙功能打开,当搜索到蓝牙名为“Newgamepad N1”的设备时,选择配对连接;如图2
- 3.连接成功, LED1指示灯常亮!如图3
- 4.进入游戏(游戏厅或模拟器下载的游戏可以直接玩)
- 5.进入游戏(游戏厅或模拟器下载的游戏可以直接玩)
- 6.推荐游戏:
1.荒野行动 2.CF(穿越火线) 3.小米枪战 4.王者荣耀 5.终结者2



iOS设备 X_Keyboard模式使用说明:


X_Keyboard模式支持iOS越狱设备,支持第三方购买的游戏平台在相关手机游戏或模拟器下载的游戏同样支持(请关注艾派格官方微博公众号,下载游戏大厅,购买第三方激活码,激活游戏大厅,仅限中国大陆地区)

- 1.同时按住NEW键+ 键2秒,此时四个LED指示灯同时快闪;如图1
- 2.将iOS设备越狱的蓝牙功能打开,当搜索到蓝牙名为“Newgamepad N1”的设备时,选择配对连接;如图2
- 3.连接成功, LED3指示灯常亮!如图3
- 4.支持iOS9.3以上系统。
- 5.购买第三方(hand joy)激活码,激活游戏大厅,在游戏大厅下载游戏后,可以直接播放;

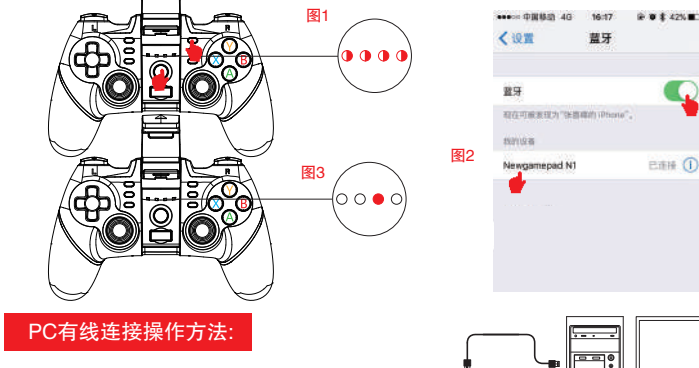

PC有线连接操作方法:

- 1.手柄按START键可以通过USB线直接与电脑USB口连接。此时进入USB有线模式状态。
- 2.有线模式连接OK后,LED2指示灯常亮。
- 3.支持以模拟器方式运行的游戏!



PC设备蓝牙连接操作方法:

- 1.关机状态下,同时按 +ANDROID键2秒,此时四个LED指示灯同时快闪;
- 2.将蓝牙接收器插入PC设备的USB接口,Windows系统会自动安装驱动程序;
- 2.2驱动程序安装成功后,会在电脑的右下角显示蓝牙设备的符号,如下图1;
- 2.3将鼠标移动到蓝牙符号处,单击鼠标右键,选择“添加设备”;如下图2;
- 2.4选择“添加设备”后,会在对话框内搜索到设备的型号(PG-9077)图标;如下图3;
- 2.5点击“下一步”,并选择“不使用代码进行配对”,确认后则会自动添加,提示蓝牙连接成功!连接OK后,LED1指示灯常亮!如下图4;
- 2.6蓝牙连接成功后,在D_INPUT模式下,支持以模拟器方式运行的游戏!



iOS按键映射功能:

- 1.支持iOS第三方游戏平台(thany joy),如需要更改按键功能,在游戏厅内操作手柄即可更改;
- 2.艾派格游戏大厅映射方法:同时按下START+SELECT组合键弹出映射菜单;
- 3.将需要映射的按键,拖到相应的触摸功能键上与之重叠保存后即可操作游戏!




Turbo功能:

- 1.Turbo功能设定:先按加速的功能键例如: A键,再按Turbo键,此时A键有加速连打功能;
- 2.Turbo功能取消:先按已经设置加速的功能键,例如A键,再按Turbo键,此时A键的加速连打功能就取消了;




多媒体功能:

- 1.多媒体功能,需在鼠标模式下进行操作;
- 2.在HID模式连接成功后,可以通过短按 键切换到鼠标模式;此时LED2灯亮;
- 3.在鼠标模式下:
Y键: 音量+; A键: 音量-; X键: 上一曲;
B键: 下一曲; L2键: 播放/暂停; L1键: 鼠标左键; R2键: 播放/暂停; R1键: 鼠标右键; L3: 鼠标快移; R3: 鼠标慢移;



手柄充电/休眠/唤醒功能:

- 1.手柄在关机状态下(按 键开/关机)充电时,4个LED指示灯同时慢闪,充电后熄灭!当在蓝牙连接状态下充电时,当前模式灯慢闪,充电后长亮!
- 2.睡眠/唤醒功能:游戏手柄在10分钟内不使用会进入休眠状态,当需要重新使用时需按 键唤醒即可唤醒;
- 3.电池电量不足时,当前模式指示灯快闪提示;

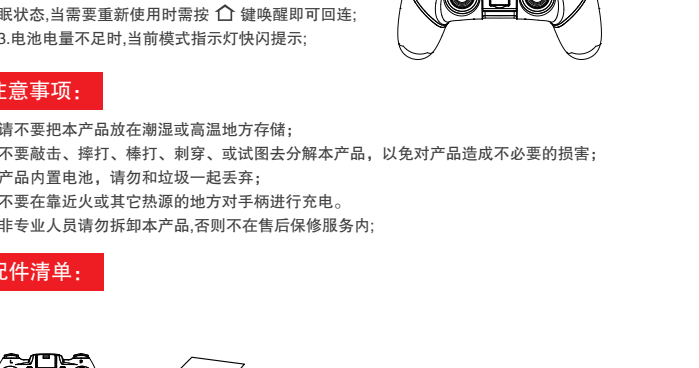

注意事项:

- 1.请不要把本产品放在潮湿或高温地方存储;
- 2.不要敲击、摔打、棒打、刺穿、或试图去分解本产品,以免对产品造成不必要的损害;
- 3.产品内置电池,请勿和垃圾一起丢弃;
- 4.不要在靠近其它热源的地方对手柄进行充电。
- 5.非专业人员请勿拆卸本产品,否则不在售后保修服务内;

配件清单:

- 游戏手柄 x1
- 说明书 x1
- Micro USB线 x1

IPega与ePega商标同属于PEGA LIMITED所有。

ipega®


Batman Bluetooth Gamepad User Manual
Instruction Manual(PG-9077)

Applicable instructions

- 1.Thanks for purchasing iPega developed Batman Bluetooth GamePad.
- 2.This Gamepad support playing games on Bluetooth enabled Android tablet/ smart phone/ TV box/ smart TV/ VR, IOS mobile phone/ tablet, and Win7/ Win8/ Win10 PC without any drivers.
- 3.L2 button and R2 button have simulator function, much more focus on operating details, make games controlled exactly.
- 4.Support TURBO(acceleration) function, make it stronger and faster when playing games.
- 5.Multimedia player buttons "Volume +, -, "last", "next" "Play / Pause" can be used under Mouse Mode.

* Due to the official game platform software upgrades or source code changes and other not resist factors caused some of the game can not be played or connected with our Gamepad, iPega company has no responsibility.iPega reserve the right of final interpretation for this.

Introduction for key functions:

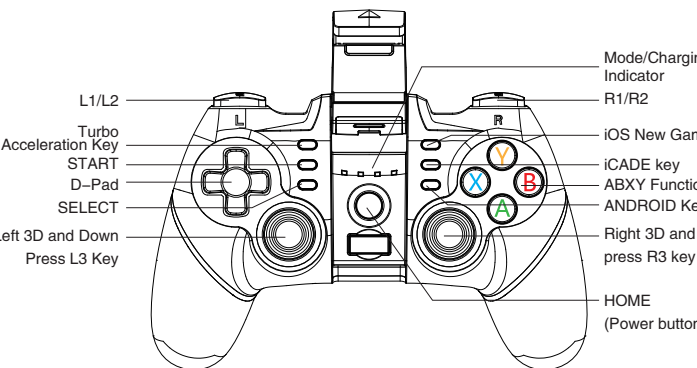

L1/L2
Turbo Acceleration Key
START
D-Pad
SELECT
Left 3D and Down
Press L3 Key
Mode/Charging Indicator
R1/R2
iOS New Game Key
iCADE Key
ABXY Function Key
ANDROID Key
Right 3D and down
press R3 key
HOME
(Power button)

Electrical Parameters:


- 1.Working voltage: DC3.7V
- 2.Working current: 30 mA
- 3.Consecutive Usage Hours: 12H
- 4.Sleep mode current: <10uA
- 5.Charging voltage/current: DC5V/500mA
- 6.Bluetooth transmission distance: <=8M
- 7.Battery capacity: 380mAh
- 8.Standby time: up to 30days once fully charged

Operation instructions:

Working mode	Android system	Mouse Mode	iCade Mode
Bluetooth pairing buttons (Press and hold on 2's)	Android+ button	In HID mode, press the key to shift	iCade+ button
Indicator	LED1	LED2	LED4
Remark	Press button to swift to mouse mode from HID mode		Keyboard English Input Method by Default

Working mode	Windows system	
Bluetooth pairing buttons (Press and hold on 2's)	Press +Android button	Press START button to power on
Indicator	LED1	LED2
Remark	User need purchase 2.1 Bluetooth dongle separately	Need USB data cable

Android Game Center




Scan to download Android Game Center
Android system users only

Usage of Android device

It support the emulator games and other games. Such as Contra, Metal slug, MC4, Wild blood, Dungeon Hunter, Zombie, FC emulator, GBA emulator, Arcade emulator, SFC emulator, N64 emulator, sonic CD, Cody, Soulcraft, zenonia4, 9 Innings 2013, Riptide GP, etc. Or you can scan QR code to download "Android Game Center" APP to your phone and download the games from this App for playing without settings.

- 1.Press and hold Android key and key for 2 seconds at the same time, 4 LED indicator lights will blink simultaneously.Pic 1
- 2.Open the Bluetooth on Android device, click searching.
- 3.Find and select "PG-9077" for Bluetooth pairing.Pic 2
- 4.LED1 lit on after Bluetooth connected.Pic 3
- 5.Enter the game.(You can directly play the games which downloads from the game centers or other emulators)

It also supports kinds of most popular games which download from Google Play Store, such as: Implosion / Dead Trigger / Dead Effect / CS Portable / The dungeon hunter 4 glory palace / SHADOWGUN: DeadZone / SoulCraft - Action RPG

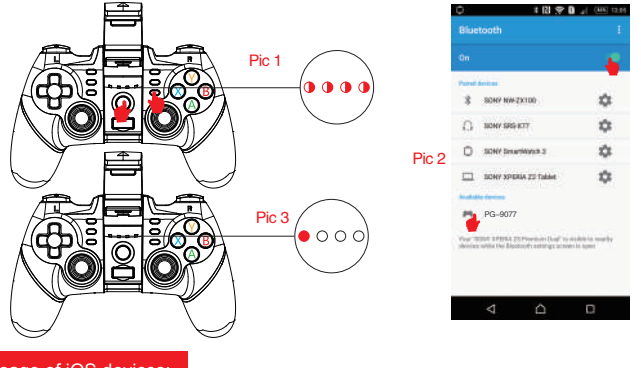

Usage of iOS devices:

Support iOS non jail-breaking devices. Could play some games which download from Apple APP Store. Searching "iCade" from APP Store will come out vast of iCade games for playing.


- 1.Firstly, you need to set keyboard input in English.Pic 1
- 2.Press and hold iCade button + button for 2's, then release two buttons until all 4 LED indicator lights flash quickly.Pic 2
- 3.Open the Bluetooth on iOS device, click searching, Find and select "PG-9077" for Bluetooth pairing.Pic 3
- 4.LED4 lit on after Bluetooth connected.Pic 4

Support parts of games under iCade mode:

Akane the Kunoichi Lite-haruneko Temple Run-Imangi Studios, LLC Rush city-Accelerato Iron Frost-YOMEN, inc. Recess Riot-Deceased Pixel LLC Super Mega Worm Lite - Deceased Pixel LLC Emerald Mine - Les Bird Guns n'Bottles - Ivanovich Games Dannaku Unlimited 2 lite - Bullet Hell Shump quib - Andrew Brinkhaus Alien Annihilation-Free retro - space shooter Alien Apps	Bullet Hell Infinite - Nicolas Bevilard Retro Dust-Classic Arcade - Asteroids Vs Invaders RI Productions I-Werewolf LITE - Daniel Novais Recess Riot Lite - Deceased Pixel LLC Space Invasion FREE - merlyn lear Vector Star Brawl - Jorge Arroyo The Invaders - RI Productions Towerman - Tomek Szczepanski Bunny Leap - John Carlyle
---	---


USB Cable Connection to PC:

1. Press and hold the START key on the gamepad to connect directly to PC through MICRO USB data cable. It will enter USB wired mode status at this moment.
- 2.LED2 indicator lit on after successful wired connected.
- 3.Support playing simulator games under this mode.

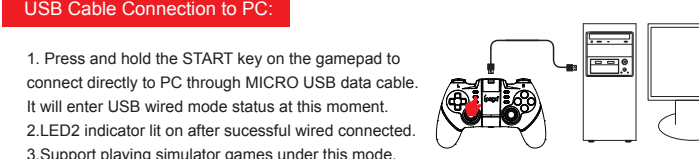

Bluetooth connection to Android Smart /TV /TV box:

1. Insert Bluetooth dongle (not included in the package, need purchase separately) into the USB interface on Smart TV or TV box.
2. Press and hold + ANDROID button, All LEDs will flash quickly at this moment means gamepad entered wireless matching mode.
3. Once Bluetooth connecting LED1 will light on.
4. Then it ready for playing games which download and installed into the Android smart TV and TV box.




Bluetooth connection to PC:

1. When product is power off, press and hold + ANDROID key for 2 seconds, at this moment, four LEDs will flash quickly together.
- 1.1 Insert the Bluetooth 4.0 Dongle into the USB interface on PC device: The driver will be installed by Windows system automatically; (Bluetooth 4.0 Dongle need purchased separately)
- 2.2 After the driver is installed successfully, the symbol of the Bluetooth device will be displayed in the lower right corner of the computer;
- 2.3 Move the mouse to the Bluetooth symbol, click the right mouse button, and select "Add device";
- 2.4 After selecting "Add device", the device model (PG-9077) icon can be searched;
- 2.5 Click "next", and select "Do not use the code to match", it will be automatically added after confirmed, then remind the Bluetooth was connected! After connected, the indicator light is always on;
- 2.6 If it be D_INPUT mode after the Bluetooth is connected successfully and can support the games running in simulator way.


Turbo Function:

1. Enabling of Turbo Function: First, press the key that needs the turbo function, for example, the A key and then, press the Turbo key. At this moment, the A key will be enabled with the turbo function.
2. Disabling of Turbo Function: First, press the key that has been set up with the turbo function, for example, the A key and then, press the Turbo key. At this moment, the turbo function in A key will be disabled.

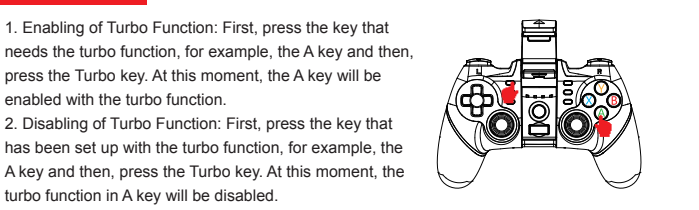

Multimedia Function:

1. The multimedia function will only operate under the mouse mode.
2. When the connection is successful under the HID mode, it can shift to the mouse mode by pressing the key for a short period; at this moment, the LED2 light will be on.
3. In the mouse mode: The key's function like the picture on the right side.

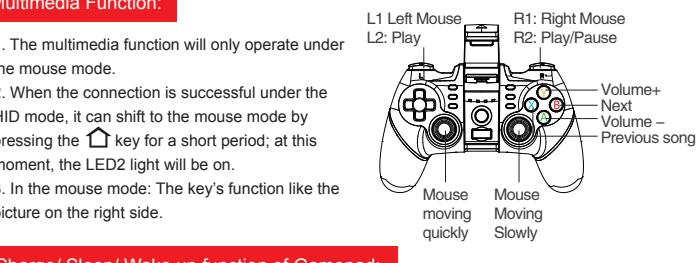

Charge/ Sleep/ Wake up function of Gamepad:

1. When the gamepad is power off (Press button to power on/off) while it is charging, 4 LED indicator lights will slowly blink. When the charging is completed, the lights will be off! When the gamepad is connected to other device via Bluetooth while it is charging, the current mode light will slowly blink. When the charging is completed, the light will be on.
2. Sleep/Wake-Up Function: The game pad cannot be used within 10 minutes and it will enter into the sleep status. When you need to use it again, press the key and it will automatically return to wake-up status.
3. When the battery power is low, the current mode indicator light will blink rapidly.

Notes:

1. Please do not store this product in wet or high-temperature areas.
2. Don't knap, beat, drub, pierce, or try to decompose this product, to avoid unnecessary damage to the product.
3. The product has built-in batteries, and please don't discard them together with the garbages.
4. Don't charge the controller in a place near the fire or other heat source.
5. Non professional personnel should not disassemble the product, otherwise it will not be covered in the after-sales warranty service.

Accessories List:

- Gamepad x1
- User Manual x1
- Micro USB cable x1

IPega and ePega trademarks all belong to PEGA LIMITED.

正面

反面