
PG-9069说明书 80g米黄色特种纸,双面折页 尺寸:840x142mm



操作使用模式

| İ | Android 系统 | | | | |
|--------|------------|----------------|---|-----------|--|
| I | | HID模式(GamePad) | | 键盘/鼠标模式 | |
| | 模式配对 | 长按HOME键5秒 | + | 长按HOME键5秒 | |
| l I | 开关位置 | F | | | |
| I | 备 注 | | | | |
| | iOS 系统 | | | Windows系统 | |

iCade 模式

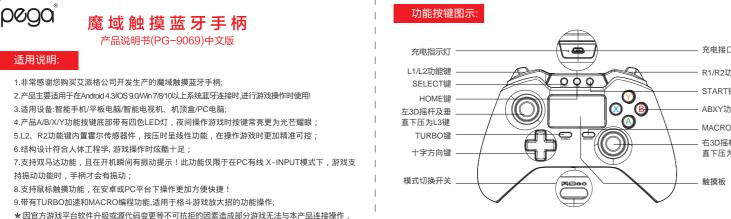

我公司不负任何责任。对此我公司保留最终解释权。

售后客服QQ群: 344494518

客服电话: 400-806-3006

在线时间: 周一至周五9:30-17:30



艾派格官方微信公众号 (扫码看教程)

- ABXY功能键 直下压为R3键

开关位置

| Android 系统 | | |
|------------|----------------|-----------|
| | HID模式(GamePad) | 键盘/鼠标模式 |
| 模式配对 | 长按HOME键5秒 | 长按HOME键5秒 |
| 开关位置 | (223) | = |
| 备 注 | | |
| | Windows系统 | |

X_Keyboard模式

备注 默认为键盘英文输入法 支持iOS非越狱设备 需配蓝牙适配器



1.抠住固定夹顶部边缘,往下扳, 2.将固定夹向下移,同时往后推. 3.将固定夹整个往后移,即可完成 直到固定夹边缘离开手柄.

- 支持鼠标触摸功能,在安卓或PC平台下操作更加方便快捷! 1、要移动光标,请在感应区域上轻轻移动手指;
- 2、要选择对象,请在触摸板表面轻轻敲击一次; 3、要双击一个对象,请将光标定位在对象上,然

SONY XPERIA Z2 Tublet

安卓设备使用说明:

后敲击两次。

安卓系统绝大多数游戏使用HID模式进行游戏操作 *在相关手机游戏厅或模拟器下载的游戏同样支持,如"葡萄游戏厅") 1.关机状态下,将模式开关置于" 🔀 "位置;

2.首次连接长按住HOME键5秒,此时ABXY键下方LED指示灯由慢闪变快闪;图1 3.将Android设备端的蓝牙功能打开,点击"扫描" 4.当搜索到蓝牙名为 " PG - 9069 " 的设备名时,选择配对连接;图2

5.连接成功,ABXY键下方指示灯常亮!图3(下次连接时,只需短按HOME键1秒,即可自动连接) 6.手机扫描二维码下载游戏平台,讲入平台下载所需要的游戏,讲入游戏(游戏厅或模拟器下载 的游戏可以直接玩)

1.荒野行动 2.CF(穿越火线) 3.小米枪战 4.王者荣耀 5.终结者2





iOS设备X_Keyboard模式

_Keyboard模式(支持iOS非越狱设备,支持第三方购买的游戏平台在相关手机游戏厅或模拟器下载的 游戏同样支持(关注艾派格官方微信公众号下载游戏大厅,购买第三方激活码,激活游戏大厅,仅限

1.关机状态下,将模式开关置于"🗴"位置;

2.首次连接长按住HOME键5秒,此时ABXY键下方LED指示灯由慢闪变快闪;图1

3.将iOS设备端的蓝牙功能打开.当搜索到蓝牙名为"Newgamepad N1"的设备名时.选择配对连接:图2 4.连接成功,ABXY键下方指示灯常亮!图3(下次连接时,只需短按HOME键1秒,即可自动连接)

5.安装第三方游戏平台,进入平台下载所需要的游戏。



1.支持iOS第三方游戏平台,如需要更改按键功能,在游戏内 操作手柄即可更改

2 世派格游戏大厅映射方法:同时按下START+SFI FCT组合 按键调出映射菜单 3.将需要映射的按键,托到相应的触摸功能键上与之重叠保存

后即可操作游戏!

PC蓝牙连接操作方法:

1.开机蓝牙搜索: 当模式开关置于 🎮 图标处,首次连接长按住HOME键5秒,此时ABXY键下 方LED指示灯由慢闪变快闪,手柄进入HID搜索状态;

2.配对连接:打开PC设备的蓝牙功能,并进行蓝牙搜索,具体操作如下:

2.1将蓝牙3.0接收器插入 PC设备的USB接口;Windows 系统会自动安装驱动程序; 2.2驱动程序安装成功后,会在电脑的右下角显示蓝牙设备的符号;如下图1

2.3将鼠标移动在蓝牙符号处,单击鼠标右键,选择"添加设备";如下图2

2.4选择"添加设备"后,会在对话框内搜索到设备的型号(如:PG-9069)图标;如下图3 2.5点击"下一步",并选择"不使用代码进行配对",确认后则会自动添加,提示蓝牙连接

成功!连接OK后,指示灯常亮!如下图4(下次连接时,只需短按HOME键1秒,即可自动连接) 2.6蓝牙连接成功后为D_INPUT模式;在D_INPUT模式下,支持以模拟器方式运行的游戏!







允许设备进行连接(L)

有线连接PC设备的操作方法

1.需用USB数据线将手柄和PC设备的USB接口 相连,WIN7以上系统默认连接OK后,指示灯常

亮,表示为X-INPUT的操作模式; 2.X-INPUT有线模式下支持绝大多数PC版的经 典大型游戏的操作! 如:极品飞车18等;

L2/R2键限位功能说明:

为了在不同游戏中,获得更好的游戏体验效 R2键 无限位功能 — 果,设置L2/R2键的操作行程限位功能! 1.当打开() 行程开关功能后,模拟量的 有效值(0~100)为:60~70之间! 2.当关闭([+++++])行程开关功能后,模拟量 的有效值(0~100)为:0~100之间!

TUBRO功能说明: 1>TUBRO功能的设定: 同时按住TUBRO和要设定的功能键

(如A键),此时A键就有加速连打功能了! 如右图 2>能够被TUBRO键的有:A. B. X. Y. L1. R1. L2. R2. 3>TUBRO功能清除:同时按住TUBRO和要设定的功能键 (如A键),此时A键加速连打功能取消!



Macro键操作说明 1. 可以当做macro的键有:L1/R

当 L1, R1用作了用于自定义的macro键时, L1, R1, 本身的键值失效 清除 L1, R1, 的macro功能后,可以恢复 L1, R1, 的键值。

2. 能够被Macro键的有:A、B、X、Y、L1、R1、L2、R2、D PAD(十字键). 3. 每一个Macro键只能编入8个键.

. 当编程好Macro键中含有的功能键,同时与macro键按下时,原按键功能同时有效

5. 用户定义macro键:

#1 在gamepad模式下,按下macro按键,指示灯闪烁两次,表示进入了macro模式 #2 按下需要编程的键(L1, R1 两个中一个), 指示灯闪烁一次,表示确认了该键; #3 此时进入了编程模式,输入需要的组合键(在A,B,X,Y以及十字键中选取),每次按键输入成功,

指示灯闪烁一次表示确认。 #4 目前可以支持的最大组合键为8个键值。

#5 当用户输入的组合键值大于8个时,会自动保存退出macro模式,指示灯闪烁四次表示退出。 当用户输入的组合键不足8个时,可以按一次macro按键,强制保存退出macro模式,指示 灯闪烁四次表示很出。

6. 清除用户定义的macro键:可以清除(L1,R1)中的组合键

#4 清除macro功能后, (L1, R1)代表其本身的键值。

#1 在gamepad模式下,按下macro按键,,指示灯闪烁两次,表示进入了macro模式; #2 按下需要编程的键(L1,R1,两个中一个),指示灯闪烁一次,表示确认了该键; #3 此时,跳过输入组合键过程,直接按下macro按键,指示灯闪烁四次表示退出。

手柄充电/休眠/唤醒功能:

1 充申时侧面I FD指示灯堂亭 充物后熄灭

2.睡眠/唤醒功能: 游戏手柄在5分钟内不使用会进 入休眠状态,当需要重新使用时需按HOME键唤 3.电池电量不足时侧面LED指示灯快闪提示



注意事项:

1.请不要把本产品放在潮湿或高温地方存储; 2.不要敲击、摔打、棒打、刺穿、或试图去分解本产品,以免对产品造成不必要的损害;

4.不要在靠近火或其它热源的地方对手柄进行充电 5.非专业人员勿拆卸本产品,否则不在售后保修服务内







Ipoga[®] Bluetooth Gamepad with Touch pad Item Code: PG-9069


1.Thanks for purchasing iPega developed Bluetooth Gamepad with Touch pad. 2.This Gamepad support playing games on Bluetooth enabled Android tablet / smart phone / TV box / smart TV / VR, IOS mobile phone / tablet , Win7 / Win8 / Win10 PC without any drivers. 3. The bottom of A/B/X/Y function key has white LED light. While the device is switched on, the LED illuminate for 3 seconds and its better for game playing in dark area. 4.L2 and R2 function keys are installed within the hall effect sensor. Make game playing be more

5. Ergonomic design bring you extremely cool and comfortable hand hold feelings. 6.With dual motor vibration Function. There is vibration feedback while power on gamepad. Support playing games which has vibration function. (under wired connected PC in X-INPUT

7. With Mouse touch function, operate more conveniently under Android/ PC platform.

* Due to the official game platform software upgrades or source code changes and other not resist factors caused some of the game can not be played or connected with our Gamepad

iPega company has no responsibility.iPega reserve the right of final interpretation for this.

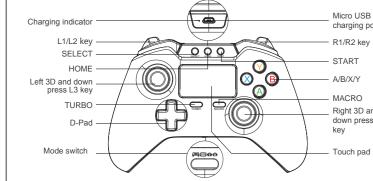

Support mouse touch function,can operate more conveniently under Android/ PC platform. 1.Please move your fingure slightly on the sensitive area if you want to move the cursor. 2.Please click the touching pad once slightly if you

3 If you want to double click an object please focus the cursor on the object and double click.



1. Align the three positioning slots of the gamepad with the three buttons on the top, and make the tioning hole on the top of fixed clip with the toggle switch of the gamedpad and push it up at the same time. bling finished after confirmed the top of the clip fixed the edge of the gamepad.







准手柄顶部的三个按钮,把手机 手柄上的拨动开关,同时往上推, 装配完成, 支架固定夹从手柄底部穿过. 手机支架拆卸步骤:





电性参数:

1.工作电压:DC3.7V

2 丁作由流:50 mA

3.持续使用时:10H

4.静态电流: <35uA

手机支架装配步骤:



5.充电电压/电流: DC5V/500m/

6.蓝牙传输距离: 8M

8.待机时间:满电放置60天

7.电池容量: 380mAh



8.Standby time: up to 60days once fully charged

will turn off after fully charged. 2.Sleep/Wake up function: Gamepad will enter into sleeping mode if not in use for 5 minute, and press HOME button for wake up and reconnect automatically 3. The side of LED indicator flashing quickly for low



5.Charging voltage/current: DC5V/500mA

7.Battery capacity: 380mAh

battery remind.

| Android system | | | | | |
|---------------------------|------------------------------------|---------------------------------|--|--|--|
| | HID Mode(GamePad) | Keyboard/Mouse Mode | | | |
| Bluetooth pairing buttons | Press HOME button for 5 seconds | Press HOME button for 5 seconds | | | |
| Mode Switch location | FEG | | | | |
| Remark | | | | | |
| | | | | | |

| iOS system | | Windows system |
|---------------------------|-----------------------------------|--|
| | iCade Mode | HID Mode (GamePad) |
| Bluetooth pairing buttons | Press HOME button for 5 seconds | Press HOME button for 5 seconds |
| Mode Switch location | Ď | (228) |
| Remark | Default English keyboard input | Need buy a USB Bluetooth 3.0 receiver |
| | | |



Scan to download Android Game Center Android system users only

It supports the vast majority of games, such as: Shadow gun/Modern Warfare 5/Asphalt/Cor tract/metal Slug, and emulator games (such as MC4, Wild blood, Dungeon Hunter, Zombie, FC emulator, GBA emulator, arcade emulator, SFC emulator, N64 emulator, Shadow gun, sonic CD, Cory, Soul craft, zenonia4, 9 Innings 2013, Riptide GP, etc.). Or you can scan QR code to 1.Pull the mode switch to position;

5.The LED under X/B/A/Y key will be on after Bluetooth connected successfully; Pic3 (Press and 6. You can scan QR code to download Android Game Center and download games from Android

nplosion / Dead Trigger / Dead Effect / CS Portable / The dungeon hunter 4 glory palace SHADOWGUN: DeadZone / SoulCraft - Action RPG




rt iOS non jail-breaking devices. Could play games which download from Apple APP Store. Searching "iCade" from APP Store will come out vast of iCade games for playing.

(Support parts of games under iCade mode as game devices is limited for iOS system.) 1.Firstly, you need to set keyboard input in English. Pic1

2.Pull the mode switch to position; 3. Press and hold HOME 5 s n, release Home button until LED indicator under X/B/A/Y flash slowly turn to quickly; Pic2

4. Turn on Bluetooth function on iOS device, and click scan to search; 5. Find and select "PG-9069" for Bluetooth pairing; Pic3

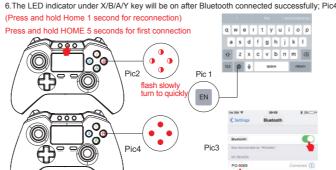

Support parts of games under iCade mode


Super Mega Worm Lite - Deceased Pixel LLC Emerald Mine - Les Bird Guns n'Bottles - Ivanovich Games Danmaku Unlimited 2 lite - Bullet Hell Shump The Invaders - RI Productions qub - Andrew Brinkhaus Alien Annihilation-Free retro - space shooter Bunny Leap - John Carlyle Heli Apps

Retro Dust-Classic Arcade - Asteroids Vs

Towerman - Tomek Szczepansi

1.USB data cable is required to connect the USB port of the PC device with the gamepad. When the WIN7 or above system is connected by default, the indicator light is on, and showing the operation mode of X-INPUT.

games in PC version. Such as: 1.Need for Speed

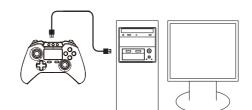

games running in simulator way.

1. Turn on Gamepad for Bluetooth pairing: Pull the mode switch to position. Press and hold HOME 5 seconds for first connection, release Home button until LED indicator under X/B/A/Y

2. Bluetooth paring: Turn on the Bluetooth setting on our PC and start searching Bluetooth device. Detail operation as following:

in the lower right corner of the computer. 2.3 Move the mouse to the Bluetooth symbol, click the right mouse button and select "Add

 $2.4\,\mbox{After}$ selecting "Add Device", the icon of the model of the device (PG-9069) will be searched in the dialog box;

A/B/X/Y/L1/R1/L2/R2 can be set as Turbo functions. Press the Turbo set butto it has the continuous attack function in the games.

Follow below steps set and clear the Turbo function: Press and hold the button you want set Turbo function (such as A button), then press the Turbo button until indicator blinks then release two buttons.

Step 2 Press and hold button A and the indicator blink all the time means A button was successful set Turbo function in the games. Clear Turbo function: Press and hold A button, then press Turbo button, indi blink until you release two buttons, means you have cleared the Turbo funct A button and restores the default key value. Remark:

1. Follow above steps set other button B/X/Y/L1/R1/L2/R2 with Turbo functions 2. It not support to store the Marco settings while game controller powered off.

3.产品内置电池,请勿和垃圾一起丢弃;





说明书 x1

Instruction of L2/R2 analog limit switch Function

专利号: ZL201630192784.2

In order to gain better gameplay

experience during playing differen

games, you can set analog gameplay

1. After turned on the analog limit switch

(0~100) will be between 60~70

2. After turned off the analog limit switch

control function for L2/ R2 buttons.


function, the valid value of analog

function, the valid value of analog

(0~100) will be between 0~100

low to connect PC device for playing games by using USB data cable

In X-INPUT wired mode, it can support the operation of vast majority of classic large-scale

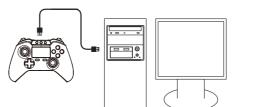

2.1 Insert Bluetooth 3.0 receiver into the USB interface on PC device; Windows system will automatically install the driver. 2.2 After the driver is installed successfully, the symbol of the Bluetooth device will be displayed

2.5 Click "Next" and select "Do not use the code to match", it will be automatically added after confirming, then remind the Bluetooth is connected successfully! After connecting OK, the indicator light is always on! (Press and hold Home 1 second for reconnection) 2.6 It will be D INPUT mode after the Bluetooth is connected successfully, and can support the

Through the Marco button, for example, we can set the function of A/B/X/Y button to R1 button and set D-pad function to L1 button. Then press R1 button will have the accelerate attack function of all A/B/X/Y buttons at the same time, press the L1 button will have the accelerate attack function of all D-pad buttons at the same time. Which will make you easy to defeat the game opponent.

Follow below steps clear the Marco function

Remark:

1. Set other Marco functional keys same as above steps.
2. It not support to store the Marco settings while game controller powered of 3. Maximum 8 keys could be set in one time.

Under Android Gamepad Mode
 Suitable set Marco buttons at the Fighting games
 The programmable button has L1,R1,L2,R2,A,B,X,Y,D-PAD (L1/R1/L2/R2 are main key, A/B/X/Y and D-PAD buttons are set key)
 The back light under A/B/X/Y button is the indicator.

Step 2 Click R1 button, indicator blink 1 time.

Follow below steps set the Marco buttons:

Click one of the main key, such as R1 button, indicator blink 1 tim Choose and click the set key, such as A/B/X/Y buttons, the indicator blink 2 times Click Marco button, indicator blink 4times means successful set R1 as a main ke
While you press the R1 button at this time, it will have all A/B/X/Y buttons function at the
same time. But R1 default key value is not existed until you clear the Marco function 1. Please do not store this product in wet or high-temperature areas

4. Don't charge the controller in a place near the fire or other heat source 5. Non professional personnel should not disassemble the product, otherwise it will not be Step 3 Click Marco button, indicator blink 4times means R1 button has cleared the Marco function and R1 key restores the default key value. covered in the after-sales warranty service.





Gamepad x1 Smart Phone Stand x1 User Manual x1 Micro USB Charging Cable x

2. Don't knap, beat, drub, pierce, or try to decompose this product, to avoid unnecessary damage

3. The product has built-in batteries, and please don't discard them together with the garbages.

Patent NO. :ZL201630192784.2





























ctrical Parameters


.Working voltage: DC3.7V .Working current: 50 mA 3.Continuous gameplay time: 10h

4.Static current: <35uA

1.The side of LED indicator will lit on while charging and

| ň | 6330 |] / 🕊 |
|---------------------------------|------------------------------------|-------|
| Press HOME button for 5 seconds | Press HOME button for 5 seconds | |
| iCade Mode | HID Mode (GamePad) | |
| em | Windows system |] |
| | | |
| | | |





3. Turn on Bluetooth function on Android system device, and click scan to search; 4. Find and select "PG-9069" for Bluetooth pairing: Pic2

Game Center for playing. 7. Support kinds of games which download from Google Play Store, such as:



Akane the Kunoichi Lite-haruneko Temple Run-Imangi Studios, LLC Rush city-Accelerate Iron Frost-YOMEN, inc. Recess Riot-Deceased Pixel LLC

Bullet Hell Infinite - Nicolas Bevillard RI Productions J-Werewolf LITE - Daniel Novais

Recess Riot Lite - Deceased Pixel LLC Space Inversion FRFF - merlyn lear Vector Star Brawl - Jorge Arroyo