

PG-9062S说明书 80g米黄色特种纸,双面折页 尺寸: 630x142mm



黑斗士蓝牙手柄 产品说明书(PG-9062S)中文版

适用说明:

- 1.非常感谢您购买ipega公司开发生产的黑斗士蓝牙手柄;
- 2.产品主要适用于在Android/iOS/Win 7/8/10系统上蓝牙连接时,进行游戏操作时使用!
- 3.适用设备:智能手机/平板电脑/智能电视、机顶盒/PC电脑;
- 4.产品A/B/X/Y功能按键底部带有白光LED灯,在开机时点亮5秒,夜间操作游戏时更为光芒耀眼;
- 5.L2、R2功能键内置霍尔传感器,按压时呈线性功能,在操作游戏时更加精准可控;
- 6.产品表面做铁灰喷漆处理,富有金属感,底壳做黑色橡胶油处理,手感更舒适,结构设计符合人体工程学,游戏操作时炫酷十足;
- 7.支持双马达功能,且在开机瞬间有振动提示!此功能仅限于在PC有线X-INPUT模式下,游戏支持振动功能时,手柄才会有振动;

*因官方游戏平台软件升级或源代码变更等不可抗拒的因素造成部分游戏无法与本产品连接操作,我公司不承担任何责任。对此我公司保留最终解释权。

售后客服QQ群: 344494518
客服电话: 400-806-3006
在线时间: 周一至周五9:30-17:30



安卓游戏平台下载二维码




方格 苹果游戏大厅 下载二维码



艾派格官方微信公众账号 (扫码看教程)

功能按键图示:

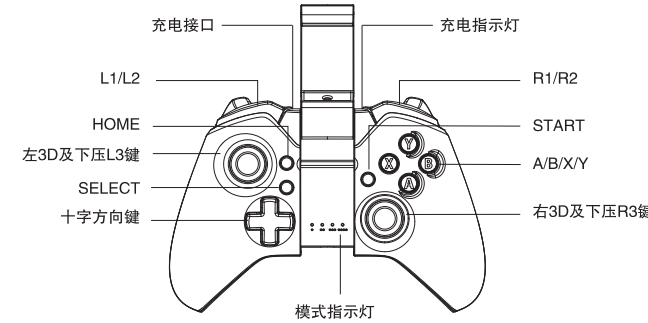

操作使用模式:

Android 系统		
	HID模式(GamePad)	鼠标模式
模式配对 (长按2秒)	X+Home	Y+Home
指示灯	LED1	LED1或LED2
备注	在HID模式下可动态切换成鼠标模式	

iOS 系统		Windows系统
	iCade 模式	HID模式(GamePad)
模式配对 (长按2秒)	B+Home	X+Home
指示灯	LED3	LED1
备注	默认为键盘英文输入法	需蓝牙适配器


电性参数:

- 1.工作电压: DC3.7V
- 2.工作电流: 30 mA
- 3.持续使用时间: 8H
- 4.静态电流: <35uA
- 5.充电电压/电流: DC5V/500mA
- 6.蓝牙传输距离: ≤8M
- 7.电池容量: 400mAh
- 8.待机时间: 满电放置30天

安卓设备使用说明:

安卓系统绝大多数游戏支持HID模式(在电脑上使用时Hid键值一样,支持绝大多数此类游戏;在相关手机游戏厅或模拟器下载的游戏同样支持,如“葡萄游戏厅”)


- 1.同时按下X键和HOME键2秒,此时LED1指示灯快闪!图1
- 2.将Android设备端的蓝牙功能打开,点击“扫描”
- 3.当搜索到蓝牙名为“PG-9062S”的设备名时,选择配对连接;图2
- 4.连接成功,LED1指示灯常亮!图3
- 5.进入游戏(游戏厅或模拟器下载的游戏可以直接玩)
- 6.推荐游戏:
1.荒野行动 2.绝地求生 3.小米枪战 4.终结者2 5.穿越火线:枪战王者 6.王者荣耀

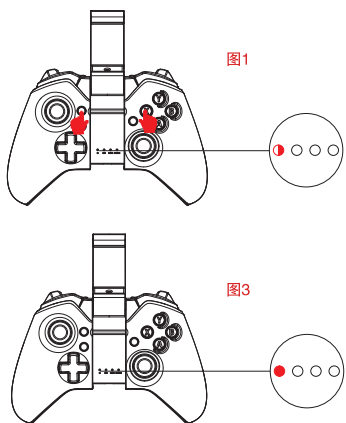

iOS设备X_Keyboard模式

X_Keyboard模式支持iOS非越狱设备,支持第三方购买的游戏平台在相关手机游戏厅或模拟器下载的游戏同样支持(关注艾派格官方微信 公众号 下载iOS版游戏大厅,购买第三方激活码,激活游戏大厅,仅限中国大陆地区)

- 1.同时按下Y键和HOME键2秒,此时LED4指示灯快闪!图1
- 2.将iOS设备端的蓝牙功能打开,当搜索到蓝牙名为“Newgamepad N1”的设备名时,选择配对连接;图2
- 3.连接成功,LED4指示灯常亮!图3
- 4.手机扫描二维码下载游戏平台,进入平台下载所需要的游戏。

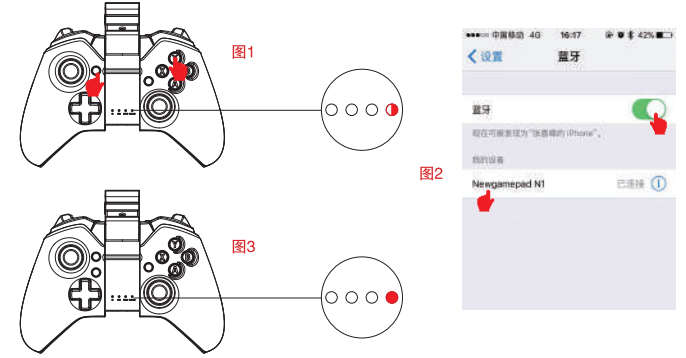


iOS按键映射功能:

- 1.支持iOS第三方游戏平台,如需要更改按键功能,在游戏厅内操作手柄即可更改;
- 2.艾派格游戏大厅映射方法:同时按下START-SELECT组合按键调出映射菜单;方格游戏大厅映射方法:同时按下L3+SELECT组合按键调出映射菜单;
- 3.将需要映射的按键,拖到相应的触摸功能键上与之重叠保存后即可操作游戏!

有线连接PC设备的操作方法:

- 1.需用USB数据线将手柄和PC设备的USB接口相连,WIN7以上系统默认连接OK后,指示灯常亮,表示为X-INPUT的操作模式;
- 2.X-INPUT有线模式下支持绝大多数PC版的经典大型游戏的操作!如:极品飞车

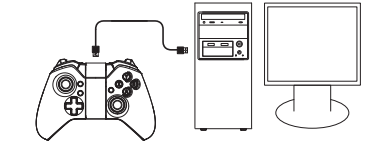

蓝牙连接PC设备操作方法

- 配对连接:打开PC设备的蓝牙功能,并进行蓝牙搜索,具体操作如下:
- 1.将蓝牙4.0接收器插入PC设备的USB接口,Windows系统会自动安装驱动程序;
 - 2.驱动程序安装成功后,会在电脑的右下角显示蓝牙设备的符号;如下图1;
 - 3.将鼠标移动到蓝牙符号处,单击鼠标右键,选择“添加设备”;如下图2;
 - 4.选择“添加设备”后,会在对话框内搜索到设备的型号(PG-9062S)图标;如下图3;
 - 5.点击“下一步”,并选择“不使用代码进行配对”,确认后则会自动添加,提示蓝牙连接成功!连接OK后,指示灯常亮!如下图4;
 - 6.蓝牙连接成功后为D_INPUT模式;在D_INPUT模式下,支持以模拟器方式运行的游戏!



手柄充电/休眠/唤醒功能:

- 1.充电时侧面LED指示灯常亮,充电后熄灭!
- 2.睡眠/唤醒功能:游戏手柄在5分钟内不使用会进入休眠状态,当需要重新使用时需按HOME键唤醒即可回连;
- 3.电池电量不足时侧面LED指示灯快闪提示;



注意事项:

- 1.请不要把本产品放在潮湿或高温地方存储;
- 2.不要敲击、摔打、棒打、刺穿、或试图去分解本产品,以免对产品造成不必要的损害;
- 3.产品内置电池,请勿和垃圾一起丢弃;
- 4.不要在靠近火或其他热源的地方对手柄进行充电。
- 5.非专业人员请勿拆卸本产品,否则不在售后保修服务内;

Ipega与ePega商标同属于PEGA LIMITED所有。
专利号: ZL2014302714740

正面

反面




Dark Fighter Bluetooth Controller Item Code(PG-9062S)

Applicable instructions

- 1.Thanks for purchasing iPega developed Dark Fighter Bluetooth Gamepad.
- 2.This Gamepad support playing games on Bluetooth enabled Android 3.2+ tablet/ smart phone / TV box/ smart TV/ VR, iOS7+ mobile phone / tablet, Win7/ Win8 / Win10 PC without any drivers.
- 3.The bottom of A/B/X/Y function key has white LED light. When the device is switched on, illuminate for 5 seconds. The light will be even more dazzling when playing game during night.
- 4.L2 and R2 function keys are installed within the hall effect sensor. They will be displayed as linear functions when the keys pressed. During the game operation, they can be more accurately controlled.
- 5.The product surface is powder-coated with iron grey powder, infusing it with metallic emotions; The bottom shell is processed with black rubber oil, enabling the hand feel to be more comfortable. As the product structure is ergonomic, you will feel extremely cool during game operation.
- 6.Dual motor function, and will have vibrating reminder once powered on. This function only worked under X-INPUT mode by wired connected PC, this gamepad have vibration function when the game support vibration.

* Due to the official game platform software upgrades or source code changes and other resist factors caused some of the game can not be played or connected with our Gamepad, iPega company has no responsibility. Pega reserve the right of final interpretation for this.

Introduction for key functions:

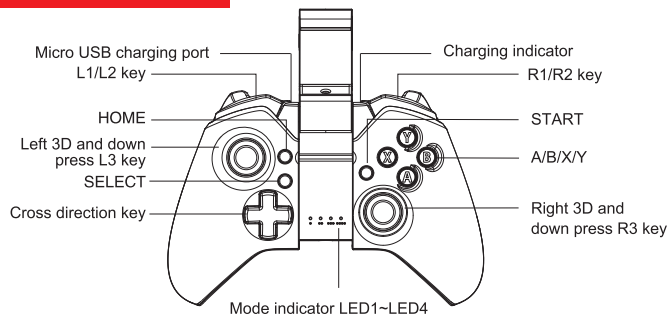


Electrical Parameters:

- 1.Working voltage: DC3.7V
- 2.Working current: 30 mA
- 3.Continuous gameplay time: 8H
- 4.Static current: <35uA
- 5.Charging voltage/current: DC5V/500mA
- 6.Bluetooth transmission distance: ≤8M
- 7.Battery capacity: 400mAh
- 8.Standby time: up to 30days once fully charged

Charge/ Sleep/ Wake up function of Gamepad:

1. The side of charging LED indicator will lit on while charging and will turn off after fully charged.
- 2.Sleep/Wake up function: Gamepad will enter into sleeping mode if not in use for 5 minute, and press HOME button for wake up and reconnect automatically.
- 3.The side of LED indicator flashing quickly for low battery remind.



Operation Instructions:

Android system		
	HID Mode(GamePad)	Mouse Mode
Bluetooth pairing buttons (Press and hold on 2's)	X+Home	Y+Home
Indicator	LED1	LED1 or LED2
Remark	Freely dynamic swift to mouse mode from HID mode	

iOS system		Windows system
	iCade Mode	HID Mode (GamePad)
Bluetooth pairing buttons (Press and hold on 2's)	B+Home	X+Home
Indicator	LED3	LED1
Remark	Default English keyboard input	No Bluetooth function PC, need buy a Bluetooth Dongle

Android Game Center



Scan to download Android Game Center
Android system users only




Octopus Driver

Usage of Android device

It supports the vast majority of games, such as: Shadowgun/Modern Warfare 5/Asphalt/Contra/metal Slug, and emulator games (such as MC4, Wild blood, Dungeon Hunter, Zombie, FC emulator, GBA emulator, arcade emulator, SFC emulator, N64 emulator, Shadowgun, sonic CD, Cordy, Soulcraft, zenonia4, 9 Innings 2013,Riptide GP, etc.). Or you can scan QR code to download Android Game Center and download games from Android Game Center for playing.


- 1.Press and hold X button + HOME button for 2's, then release two buttons until LED1 flash quickly. Pic1
- 2.Open the Bluetooth on Android device, click searching.
- 3.Find and select "PG-9062S" for Bluetooth pairing. Pic2
4. LED1 lit on after Bluetooth connected. Pic3
- 5.Support kinds of games which download from Google Play Store, such as: Implosion / Dead Trigger / Dead Effect / CS Portable / The dungeon hunter 4 glory palace / SHADOWGUN: DeadZone / SoulCraft - Action RPG

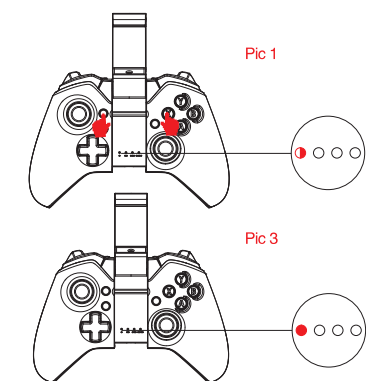

Usage of iOS devices

Support iOS non jail-breaking devices. Could play games which download from Apple APP Store. Searching "iCade" from APP Store will come out vast of iCade games for playing. (Support parts of games under iCade mode as game device is limited for iOS system.)

- 1.Firstly, you need to set keyboard input in English. Pic1
- 2.Press and hold B button + HOME button for 2's, then release two buttons until LED3 flash quickly. Pic2
- 3.Open the Bluetooth on iOS device, click searching.
- 4.Find and select "PG-9062S" for Bluetooth pairing. Pic3
- 5.LED3 lit on after Bluetooth connected. Pic4

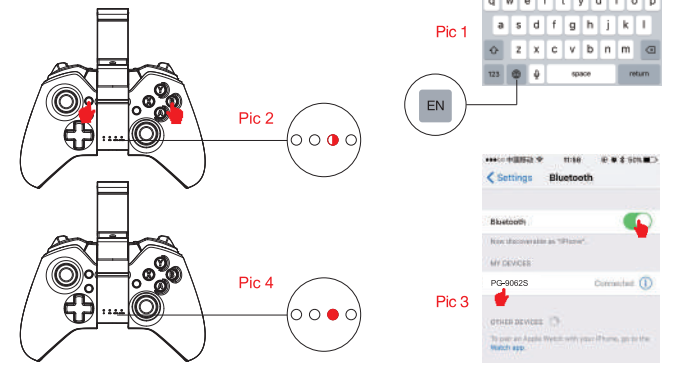

Support parts of games under iCade mode:

- | | |
|---|---|
| Akane the Kunoichi Lite-haruneko | Bullet Hell Infinite - Nicolas Bevilard |
| Temple Run-Imangi Studios, LLC | Retro Dust-Classical Arcade - Asteroids Vs Invaders |
| Rush city-Acceleroto | RI Productions |
| Iron Frost-YOMEN, inc. | J-Werewolf LITE - Daniel Novais |
| Recess Riot-Deceased Pixel LLC | Recess Riot Lite - Deceased Pixel LLC |
| Super Mega Worm Lite - Deceased Pixel LLC | Space Invasion FREE - merlyn lear |
| Emerald Mine - Les Bird | Vector Star Brawl - Jorge Arroyo |
| Guns n'Bottles - Ivanovich Games | The Invaders - RI Productions |
| Danmaku Unlimited 2 lite - Bullet Hell Shump qub - Andrew Brinkhaus | Towerman - Tomek Szczepanski |
| Alien Annihilation-Free retro - space shooter | Bunny Leap - John Carlyle |
| Heli Apps | |

How to connect PC device for playing games by using USB data cable:

- 1.USB cable is required to connect the USB port of the PC device with the gamepad. When the WIN7 or above system is connected by default, the indicator light is on, and showing the operation mode of X-INPUT.
- 2.In X-INPUT wired mode, it can support the operation of vast majority of classic large-scale games in PC version. Such as: Need for Speed



How to connect PC device with Bluetooth:

- 1.Insert Bluetooth 4.0 receiver into the USB interface on PC device; Windows system will automatically install the driver.
- 2.After the driver is installed successfully, the symbol of the Bluetooth device will be displayed in the lower right corner of the computer.
- 3.Move the mouse to the Bluetooth symbol, click the right mouse button and select "Add Device";
- 4.After selecting "Add Device", the icon of the model of the device (PG-9062S) will be searched in the dialog box;
- 5.Click "Next" and select "Do not use the code to match", it will be automatically added after confirming, then remind the Bluetooth is connected successfully! After connecting OK, the indicator light is always on!
- 6.It will be D_INPUT mode after the Bluetooth is connected successfully, and can support the games running in simulator way.

Notes:

1. Please do not store this product in wet or high-temperature areas.
2. Don't knap, beat, drub, pierce, or try to decompose this product, to avoid unnecessary damage to the product.
3. The product has built-in batteries, and please don't discard them together with the garbages.
4. Don't charge the controller in a place near the fire or other heat source.
5. Non professional personnel should not disassemble the product, otherwise it will not be covered in the after-sales warranty service.

Ipega and ePega trademarks all belong to PEGA LIMITED.
Patent NO. : ZL2014302714740